
ACO SLOT 20 CORNER UNITS

P

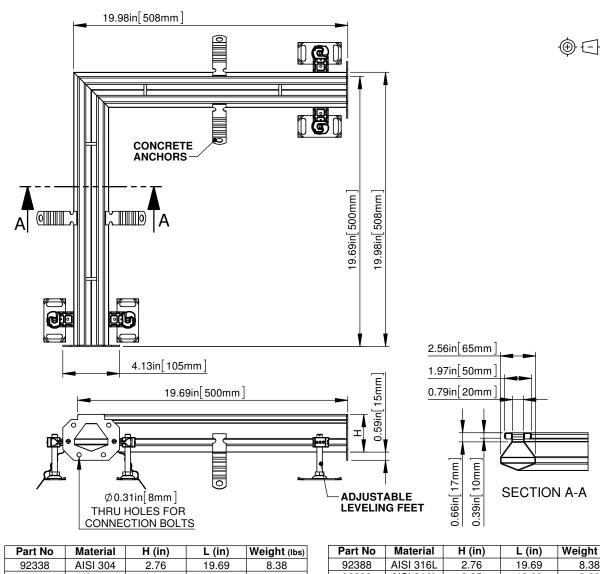

i uitito	material		_ _ (,	treight (ibs)
92338	AISI 304	2.76	19.69	8.38
92339	AISI 304	2.95	19.69	8.60
92340	AISI 304	3.15	19.69	8.82
92341	AISI 304	3.54	19.69	9.26
92342	AISI 304	3.94	19.69	9.92
92343	AISI 304	4.33	19.69	10.36
92344	AISI 304	4.72	19.69	11.02

Part No	Material	H (in)	L (in)	Weight (lbs)
92388	AISI 316L	2.76	19.69	8.38
92389	AISI 316L	2.95	19.69	8.60
92390	AISI 316L	3.15	19.69	8.82
92391	AISI 316L	3.54	19.69	9.26
92392	AISI 316L	3.94	19.69	9.92
92393	AISI 316L	4.33	19.69	10.36
92394	AISI 316L	4.72	19.69	11.02

Specification Clause

ACO Slot 20 corner units. Overall height varies, see tables. Made from 16ga (1.5mm) AISI 304 or AISI 316L, pickle passivated finish. All channels provided with NBR seal and connection bolts on one side. Number of concrete anchors and adjustable leveling feet varies by channel length.

ACO recommends checking local plumbing codes prior to installation.

ACO Polymer Products, Inc.

 Northeast Sales Office
 We

 9470 Pinecone Dr.
 825

 Mentor, OH 44060
 Ca

 Tel: (440) 639-7230
 Tel

 Toll Free: (800) 543-4764
 Tol

 Fax: (440) 639-7235
 Fax

 West Sales Office
 S

 825 W Beechcraft St.
 4

 Casa Grande, AZ 85122
 F

 Tel: (520) 421-9988
 T

 Toll Free: (866) 809-4506
 T

 Fax: (520) 421-9899
 F

Southeast Sales Office 4211 Pleasant Road Fort Mill, SC 29708 Tel: (800) 543-4764 Toll Free: (800) 543-4764 Fax: (803) 802-1063





May 2016 ACO Polymer Products, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our products since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO Polymer Products, Inc. reserves the right to change the product and specifications without notice.